GIGABYTE™

Components Introduction
Casing's Internal Structure

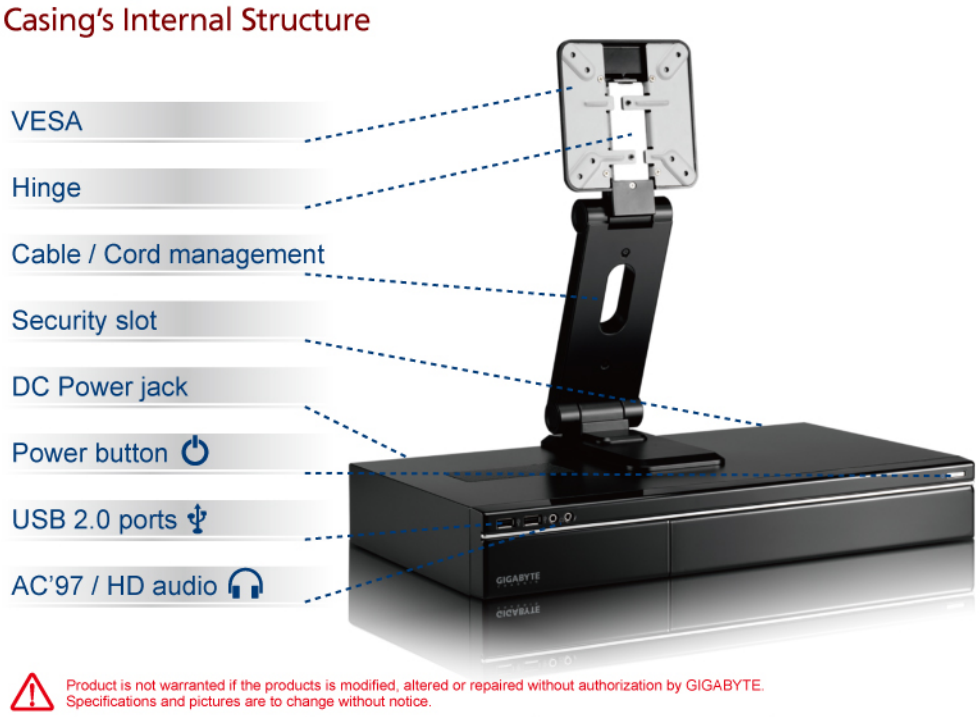

Product is not warranted if the products is modified, altered or repaired without authorization by GIGABYTE.
Specifications and pictures are to change without notice.

Components Introduction
Casing's Internal Structure

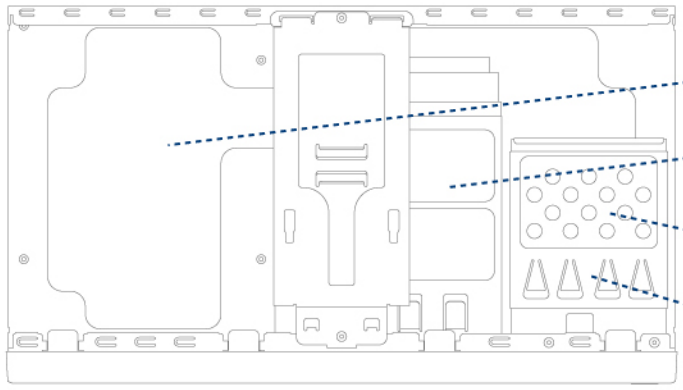

Accessory Box
MIB T5140 / MIB T5142

HDD securing screw x 6

Motherboard / ODD / Floppy securing screw x 12

LCD Monitor securing screw x 4

VESA thumb screw x 2


Wire clamp x 1

Installation of Front Multi-Media I/O ports
USB 2.0 ports & AC'97 / HD audio

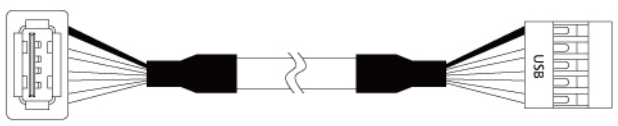

Power	1	2	Power
USB Dy-	3	4	USB Dx-
USB Dy+	5	6	USB Dx+
GND	7	8	GND
USB Over current	9	10	KEY

Be sure that different motherboards may have different installation areas and specifications, screw holes and connectors.
For detailed instructions, please refer to the motherboard user manual supplied by the motherboard manufacturer.

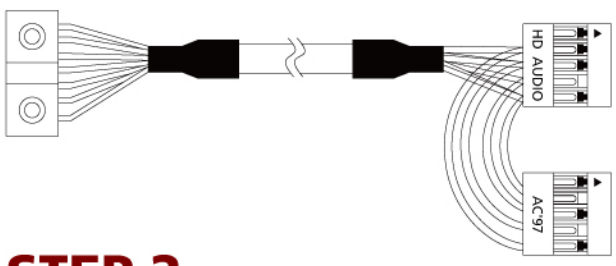

GND	1	2	MIC2_L
-ACZ_DET	3	4	MIC2_R
FSENSE1	5	6	LINE2_R
KEY	7	8	FAUDIO_JD
FSENSE2	9	10	LINE2_L

GND	1	2	MIC
NC	3	4	MIC Power
NC	5	6	Line Out(R)
KEY	7	8	NC
NC	9	10	Line Out(L)

STEP 1
Remove top cover

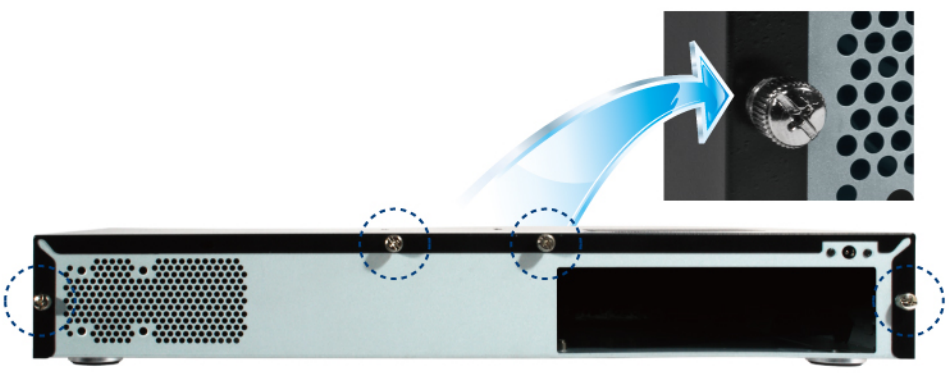

STEP 2
Installation of Motherboard

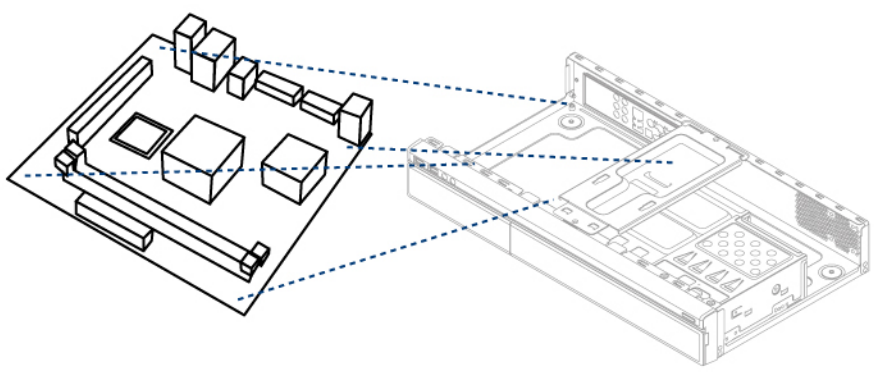

STEP 3
Installation of 5.25" & 3.5" Driver Bay

▼ Remove screw and Supporting plate

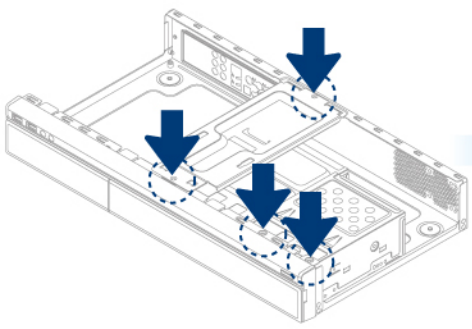

▼ Remove Drive Bay

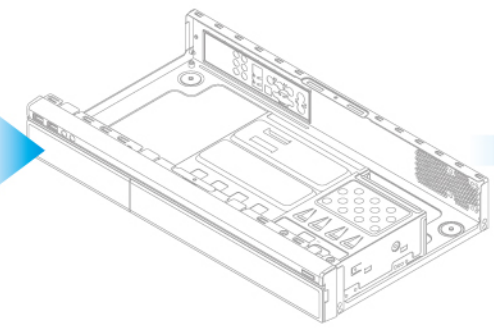

▼ 5.25" Driver Bay

▼ 3.5" Driver Bay

STEP 4
Installation of LCD Monitor to CASE

Connect hinge onto chassis and mount monitor before adjusting the angle of the hinge.

Install thumb screw

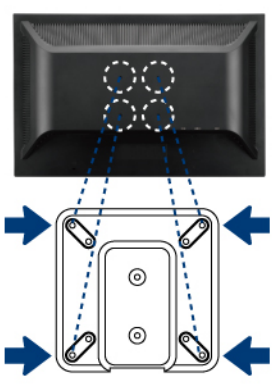
Install VESA bracket

1. Mount Monitor downwards

2. Install Thumb screw